


Classic Portable Autoclave





Prestige Medical Classic – with more than 1 million sold in 80 countries worldwide, you can rely on our reputation for quality and performance.

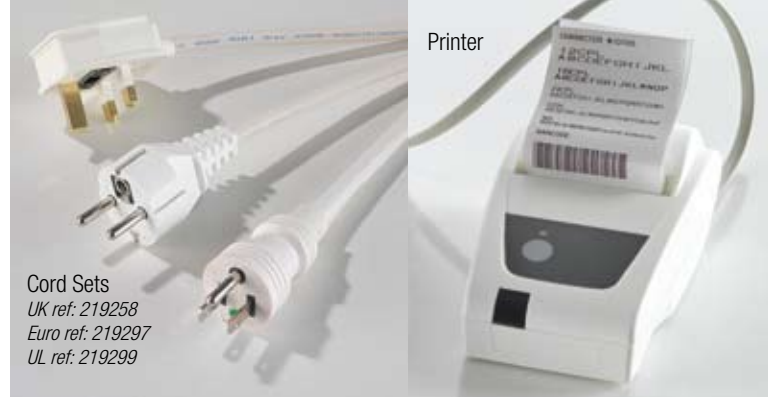

A wide choice of accessories - allows you to specify the model to suit your exact needs.

Technical Specification

Classic Portable Autoclave											
Model Number	210001	210002	210004	210006	210007	210008	210011	210047	210048	210052	210134
Max width - overall	340mm	340mm	340mm	340mm	340mm	340mm	340mm	340mm	340mm	340mm	340mm
Max height - overall	335mm	420mm	420mm	335mm	420mm	335mm	335mm	335mm	420mm	335mm	335mm
Max net weight	4.0kg	4.8kg	4.8kg	5.3kg	4.8kg	4.0kg	4.0kg	4.0kg	4.8kg	4.0kg	5.4kg
Chamber diameter	210mm	210mm	210mm	210mm	210mm	210mm	210mm	210mm	210mm	210mm	210mm
Chamber height	236mm	328mm	328mm	236mm	328mm	236mm	236mm	236mm	328mm	236mm	236mm
Chamber capacity	9 litres	12 litres	12 litres	9 litres	12 litres	9 litres	9 litres	9 litres	12 litres	9 litres	9 litres
Max instrument length	228mm	290mm	290mm	228mm	290mm	228mm	228mm	228mm	290mm	228mm	228mm
Max load weight	3kg	4kg	4kg	3kg	4kg	3kg	3kg	3kg	4kg	3kg	3kg
Sterilizing temperature	126°C	126°C	126°C	121°C	121°C	121°C	126°C	121°C	121°C	134°C	134°C
Min sterilizing time	11 minutes	11 minutes	11 minutes	18 minutes	18 minutes	16 minutes	11 minutes	22 minutes	22 minutes	3 minutes	3 minutes
Cycle time - normal	22 minutes	22 minutes	22 minutes	28 minutes	30 minutes	26 minutes	22 minutes	70 minutes	70 minutes	20 minutes	20 minutes
Operating pressure	1.4 bar	1.4 bar	1.4 bar	1.05 bar	1.05 bar	1.05 bar	1.4 bar	1.05 bar	1.05 bar	2.2 bar	2.2 bar
Voltage	230v	230v	230v	110v	110v	230v	230v	230v	230v	230v	230v
Wattage	1500w	1500w	1500w	1200w	1200w	1500w	1500w	1500w	1500w	1500w	1500w
Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Printer										✓	
Temperature & Pressure Gauges			✓								✓
Furniture	219708	219720	219720	219708	219720	219708	219708	219708	219720	219708	219708
								219706			
								219294			

All Classic units are supplied complete with electrical cord set and instruction manual as appropriate.

Reliable and trusted worldwide

Designed to give you the most cost effective sterilization solution with a wide choice of models and accessories that are guaranteed to meet your needs.

Steam sterilization, or autoclaving, is the preferred method of eliminating the risk of cross infection through contaminated instruments. It is the only method recommended throughout the world by healthcare professionals including the World Health Organisation (WHO) and the Centre for Disease Control (CDC).

